




BLU Studio 5.0 S II Speaker Replacement

This guide will show you a step by step process on how to replace a BLU Studio 5.0 S II speaker.

Written By: Maria Juzaino

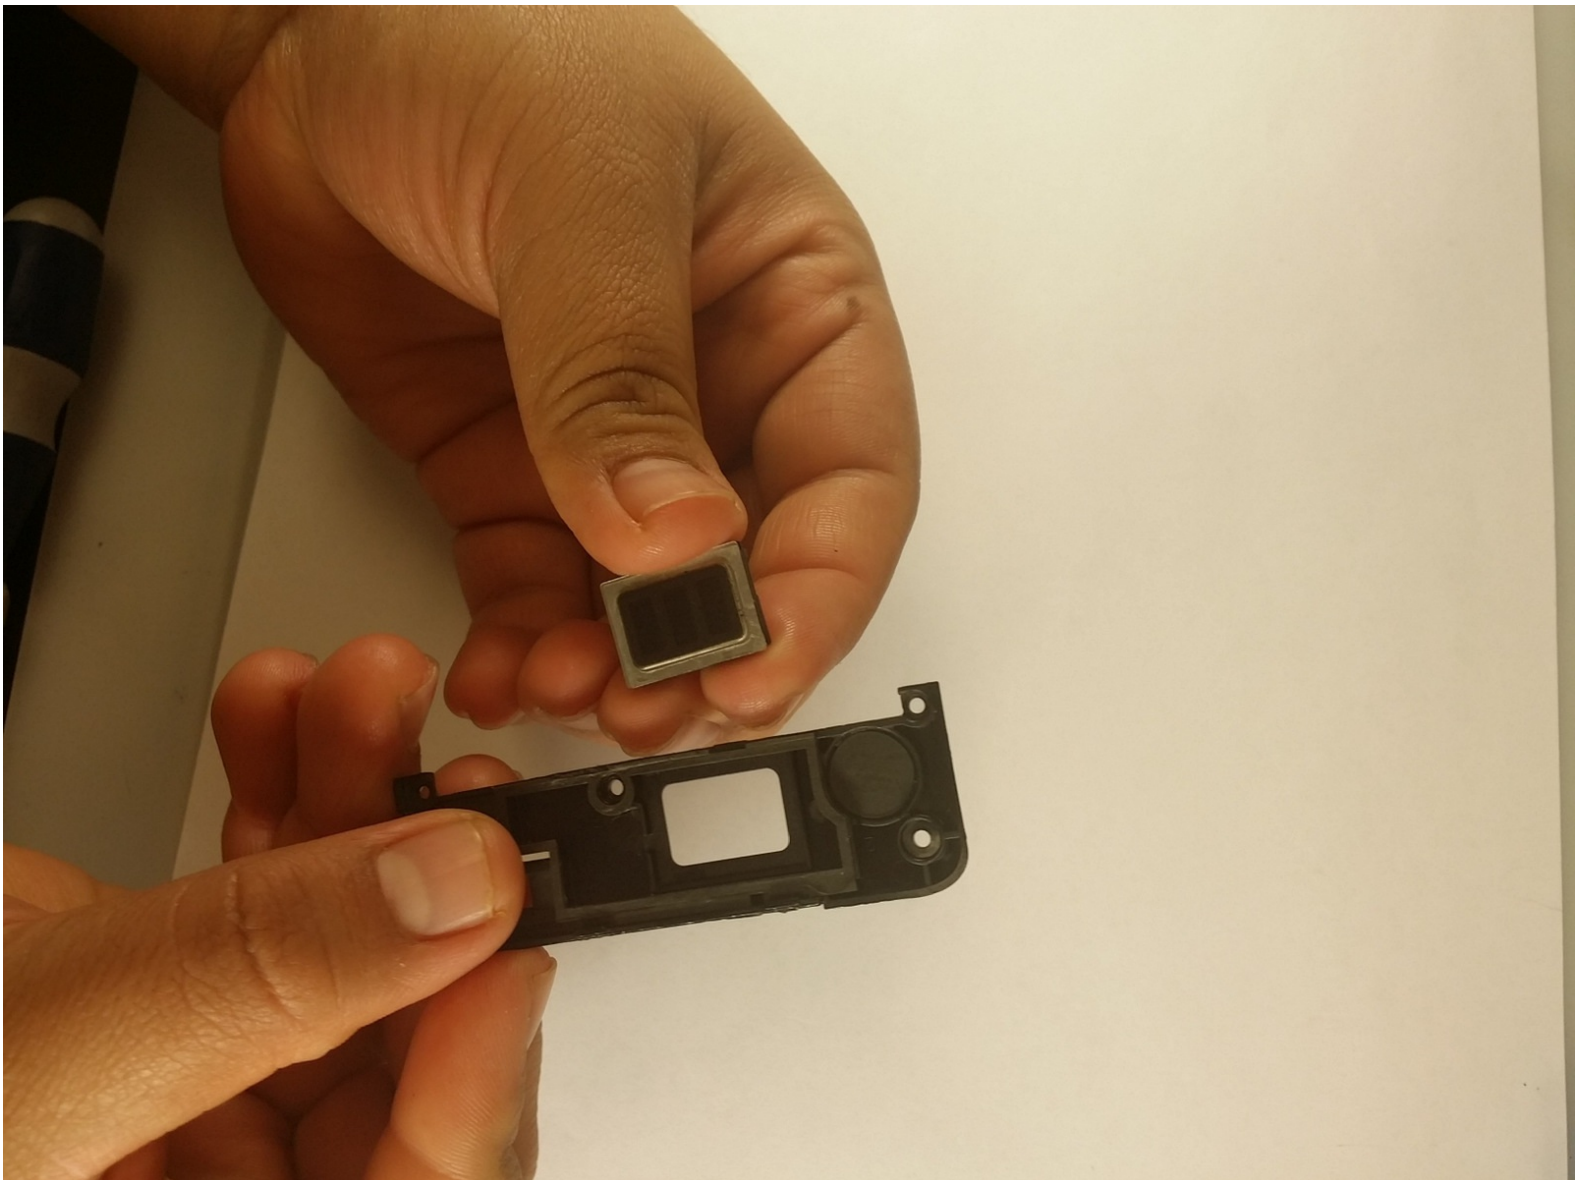


INTRODUCTION

This guide will show you how to replace the speaker on this phone.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Remove back cover.

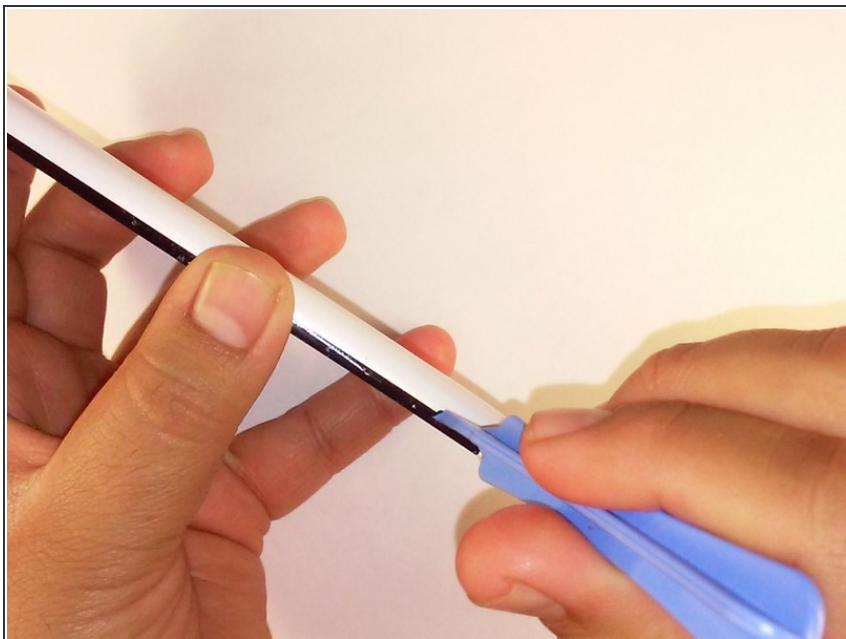

- Remove the back cover on the phone with the plastic opening tool.

Step 2 — Remove battery




- Remove battery with plastic opening tool.

Step 3 — Remove screws



- On the bottom part of the back of the phone with a Phillips screwdriver #00 tool remove the 6 screws that hold the speaker in place.

Step 4 — Remove speaker plastic backing

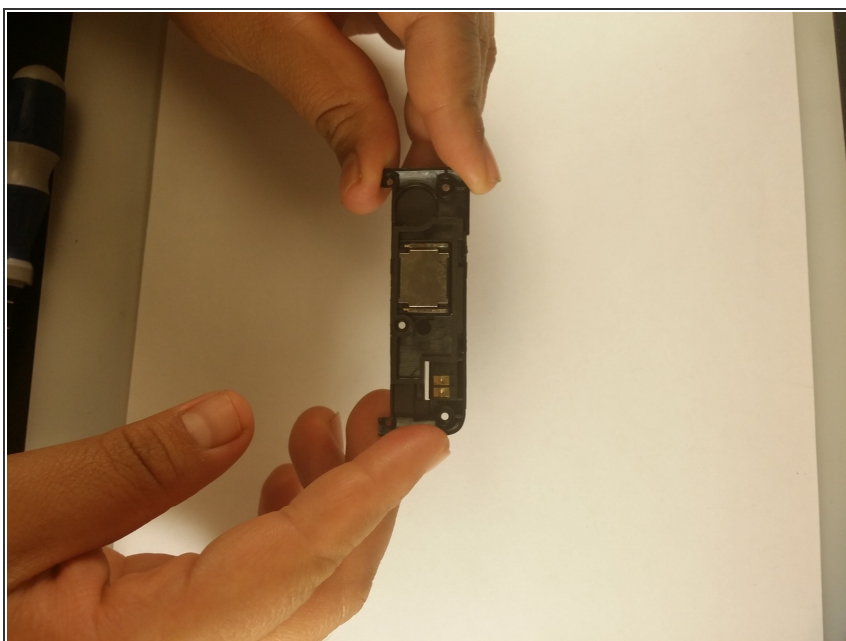


- After removing screws gently pull off the speaker from the back of the phone.

Step 5 — Remove speaker.



- Remove the speaker from the backing of the speaker holder.

Step 6 — Replace speaker.

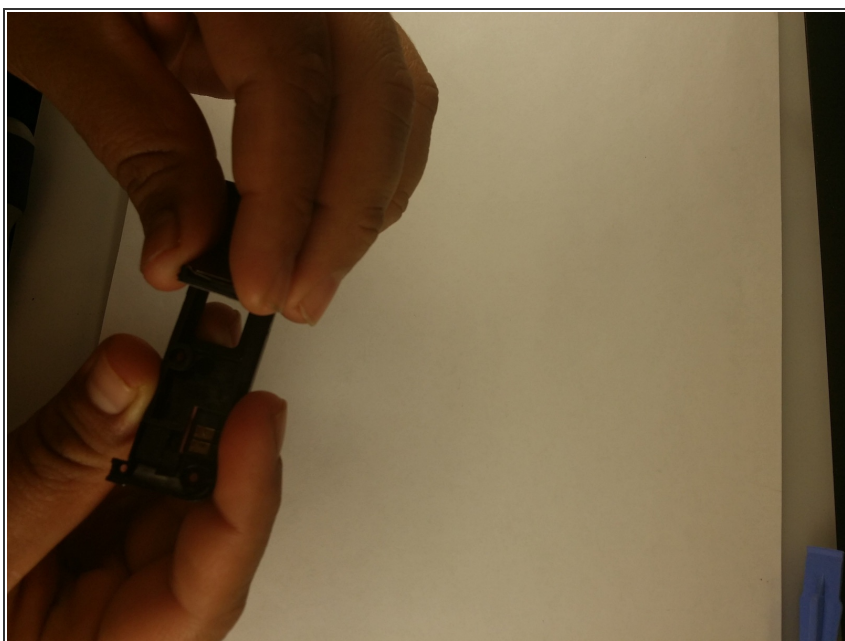

- Replace the old speaker with a new speaker. Put it back in where the old speaker was.

Step 7 — Put the screws back on



- Insert the plastic backing of the speaker back in the phone.
- Put the six screws back in the backing of the phone to hold the plastic backing securely.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 01:27:15 AM.